

CITIZEN


Miyano

# ABX51/64

Fixed Headstock Type CNC Automatic Lathe



The ultimate from bar work specialist Miyano  
The perfect turning centre with three Y axes

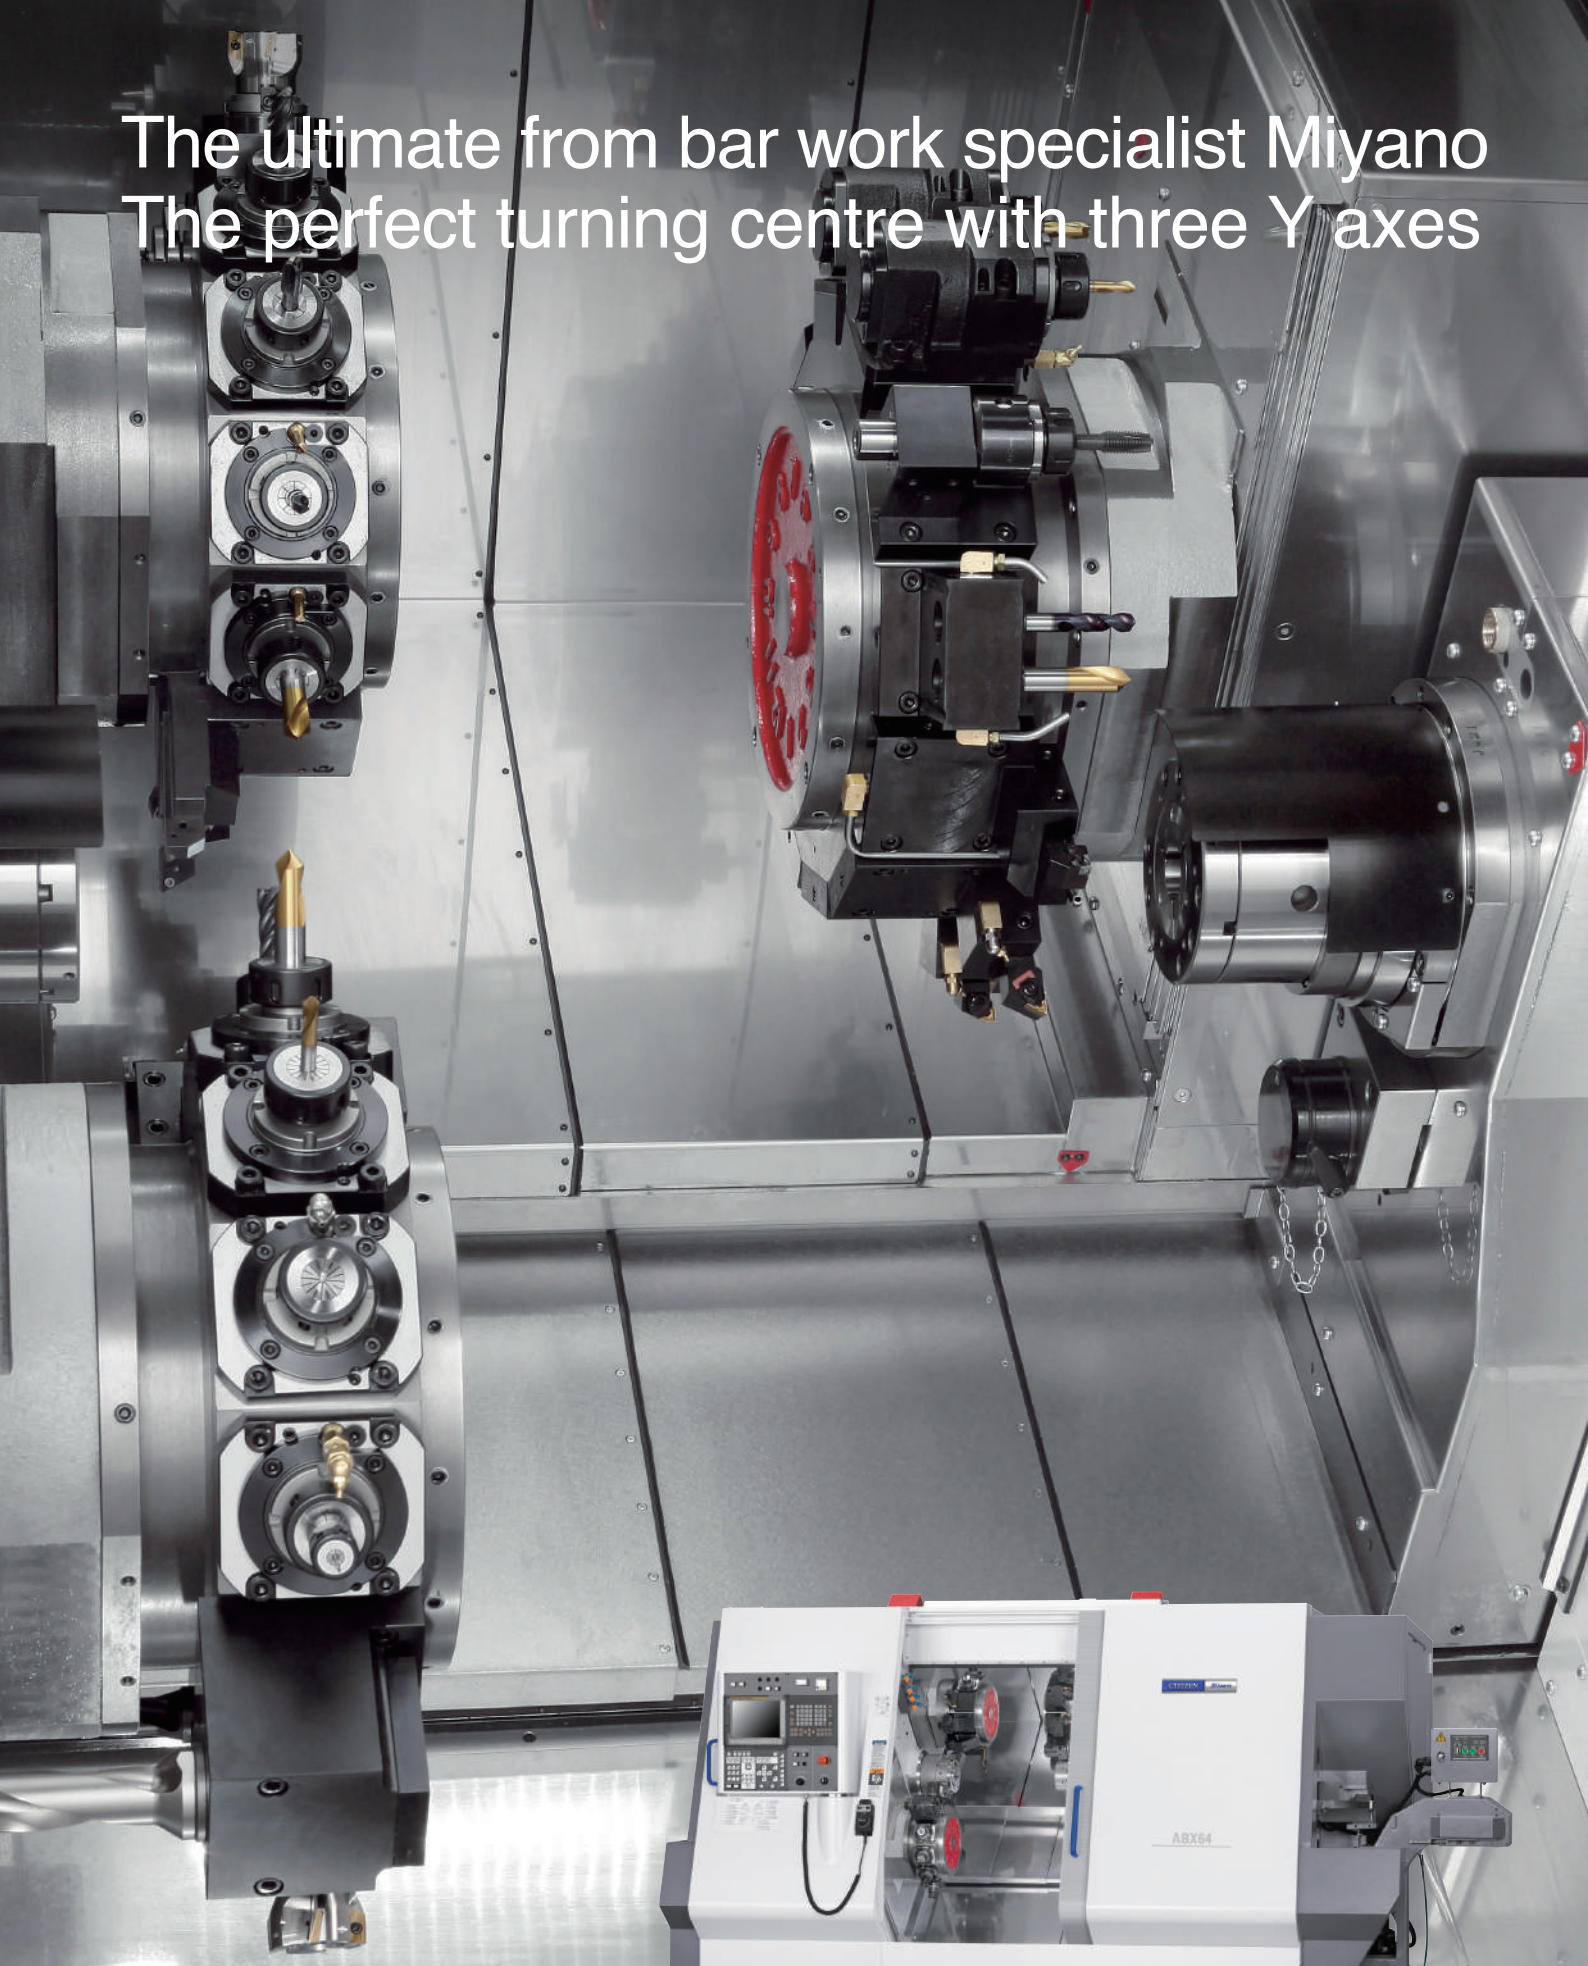

THY




A long-stroke, high-spec turning centre  
with turrets and Y axis at top and bottom



SY Y



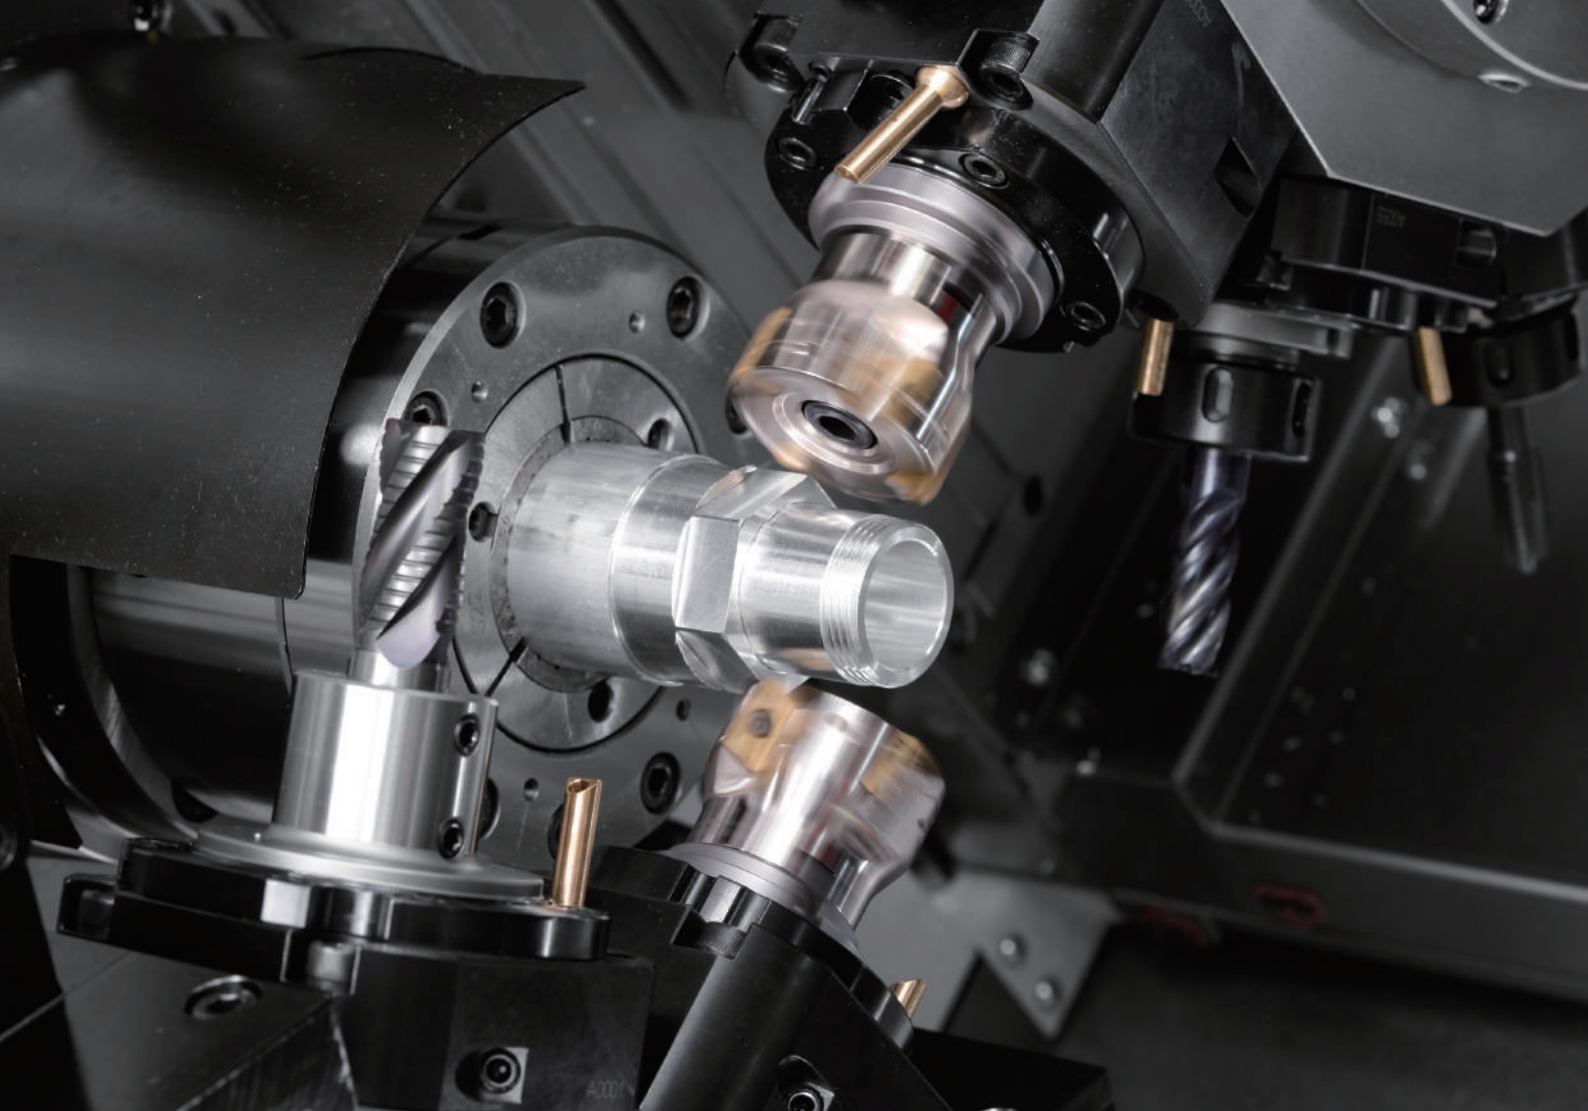

## THY


### **Three Y axes give high efficiency and height productivity**

Right and left upper turrets equipped with a Y axis, and a lower turret also with a Y axis that can unrestrictedly approach both spindles, enable the ideal process allocation and flexible tooling without any limitations imposed by machining balance.


### **Three Y axis for ultimate flexibility & high productivity**

Two upper 12 station turrets on box guideways dedicated to each spindle and a lower 12 station turret capable of working on both spindles – all with 80mm of Y axis stroke. Complete flexibility in tandem with Miyanos' world renowned accuracy and rigidity

High power, high torque (40Nm) power tool capability in any of the 36 turret stations to enable milling capability like a machining centre.

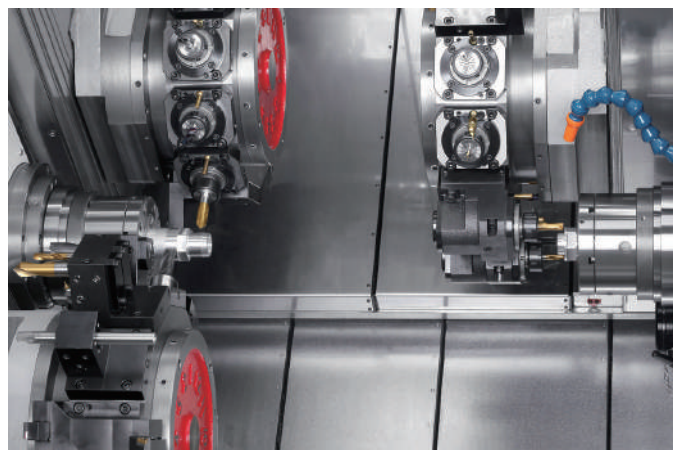

Simultaneous complex machining with three turrets

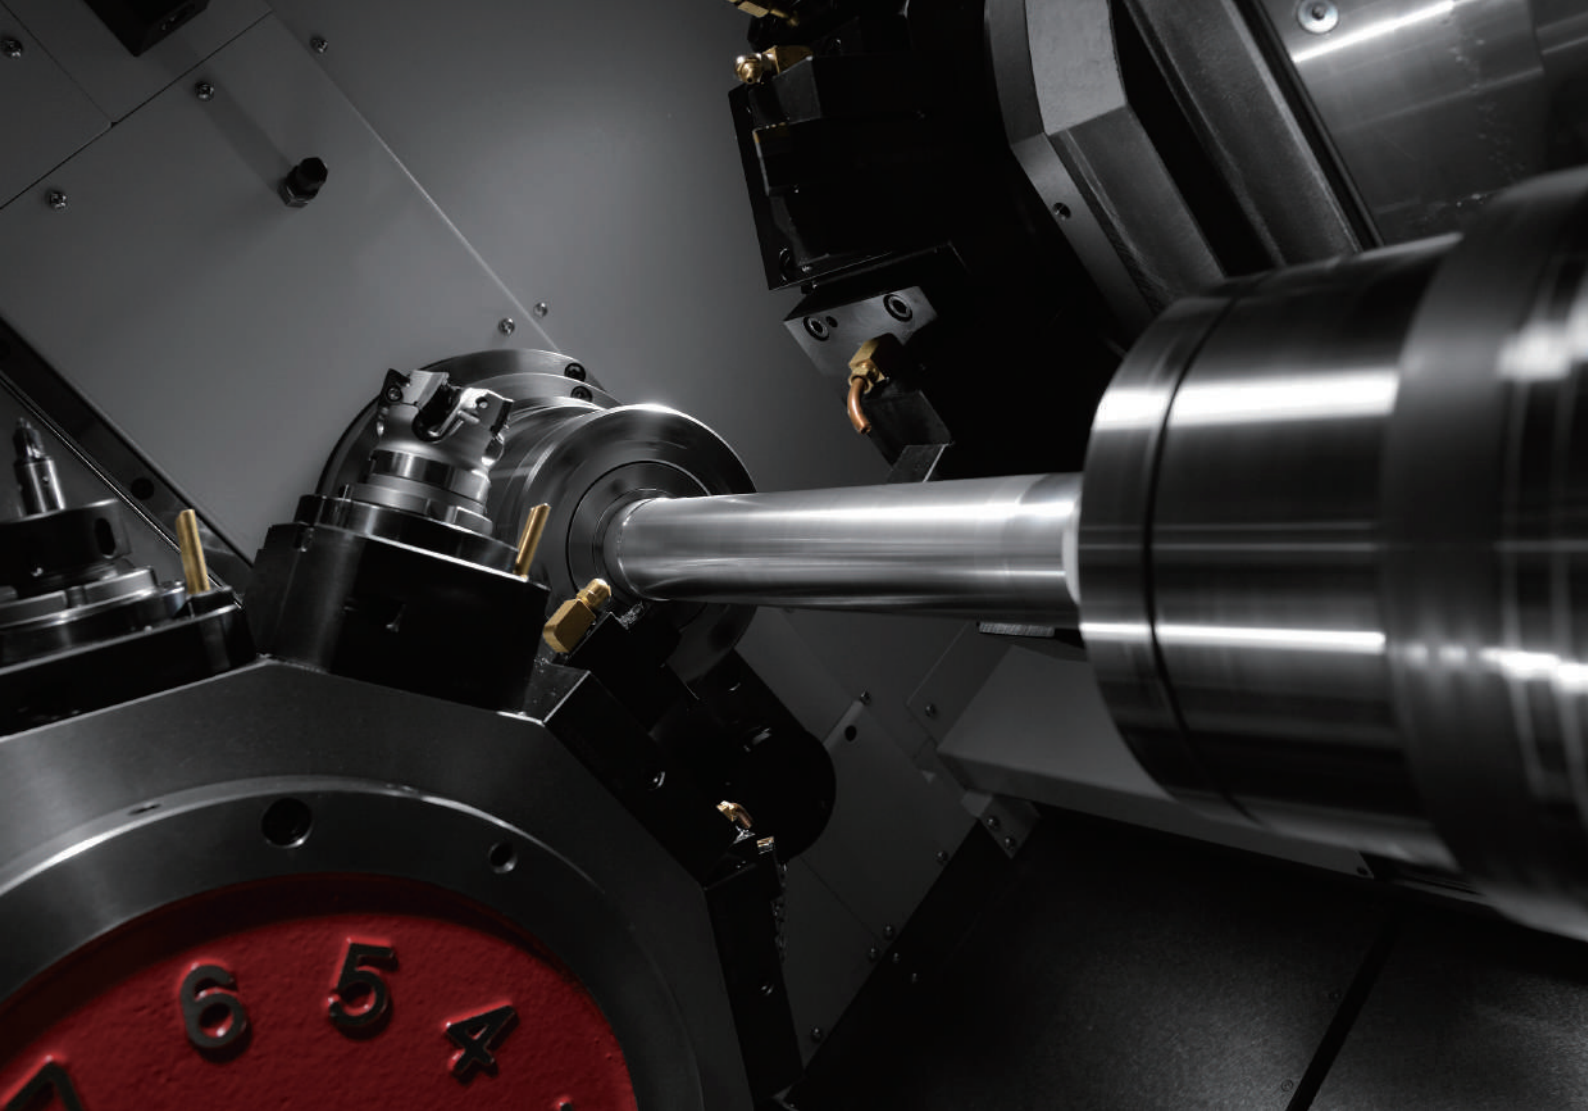

## SY Y


### **Cutting time shortened by simultaneous cutting at left and right with two Y axis**

The ability to machine simultaneously at the left and right spindles using the upper and lower turrets, both featuring a Y-axis function, means that complete front and back machining of products with complex shapes can be accomplished simply and in a short time.

### **Twin spindle twin turret machining**

Two 12 station turrets both capable of working on each spindle either separately or in tandem – both with 80mm of Y axis stroke. Complete flexibility in tandem with Miyanos' world renowned accuracy and rigidity

High power, high torque (40Nm) power tool capability in any of the 24 turret stations to enable milling capability like a machining centre.

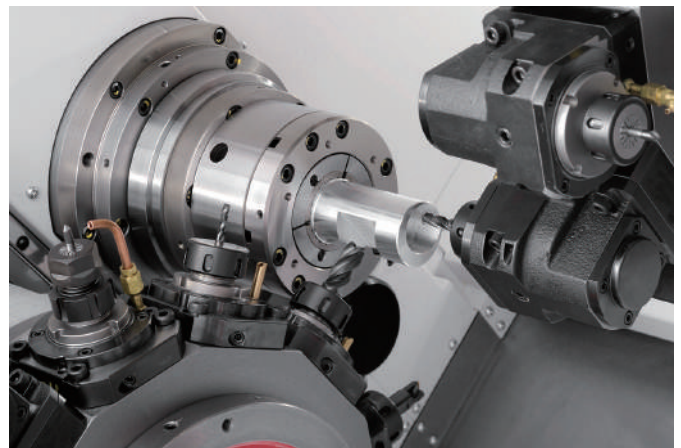


Simultaneous complex machining with two turrets




# Basic construction

ABX-THY

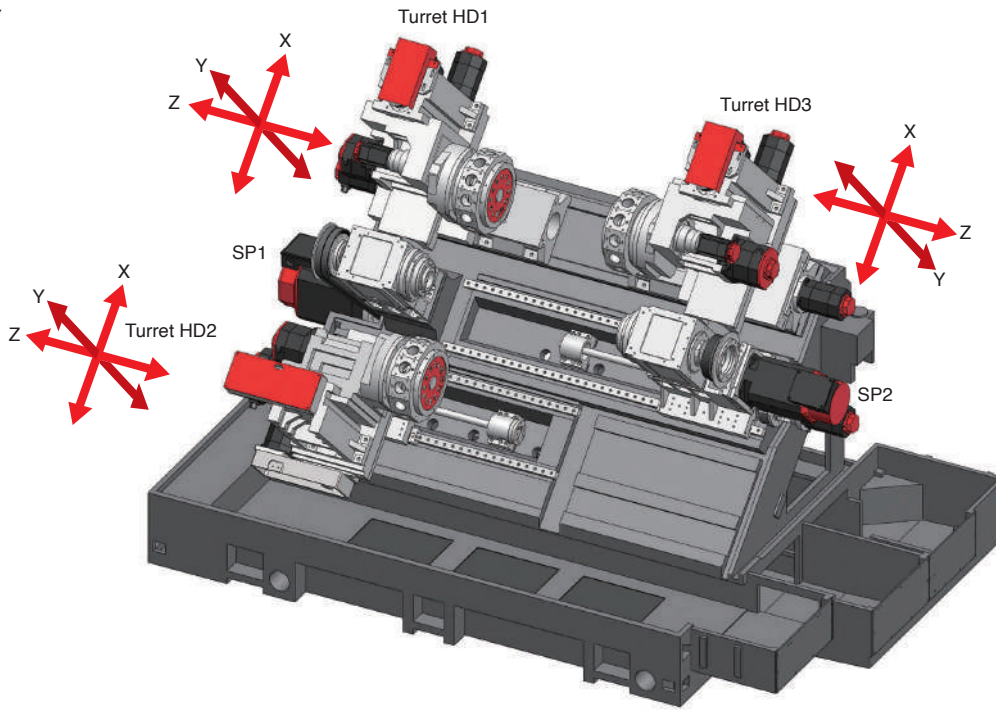

ABX-SYY

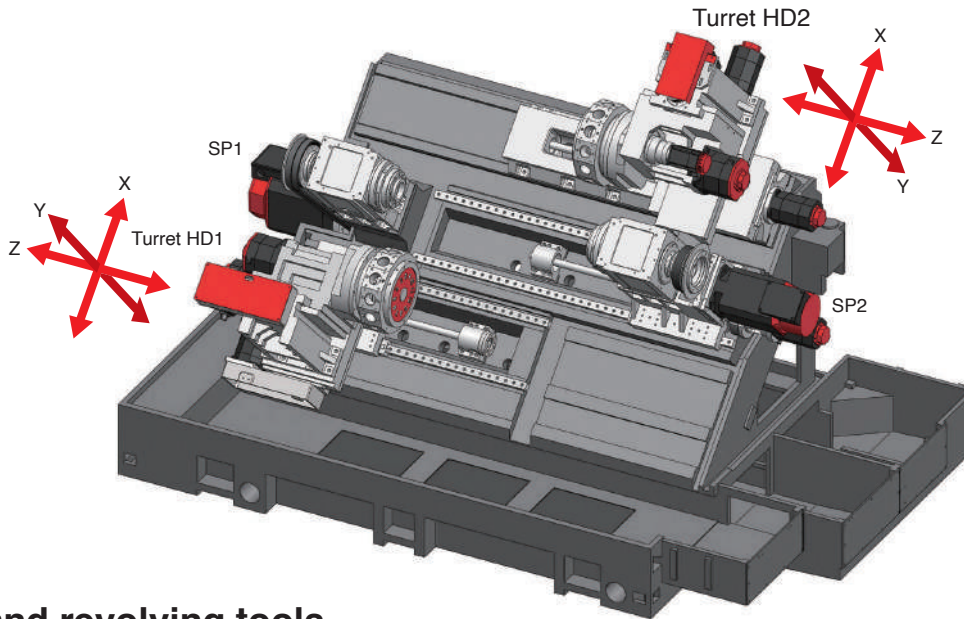


## Turret and revolving tools


High-rigidity 12-station turret



40 Nm revolving tools

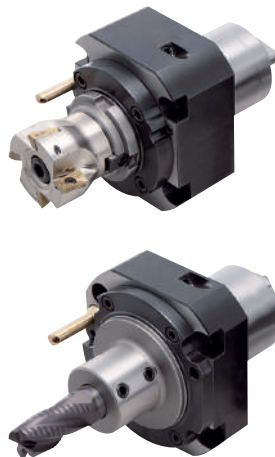


Revolving tool torque diagram

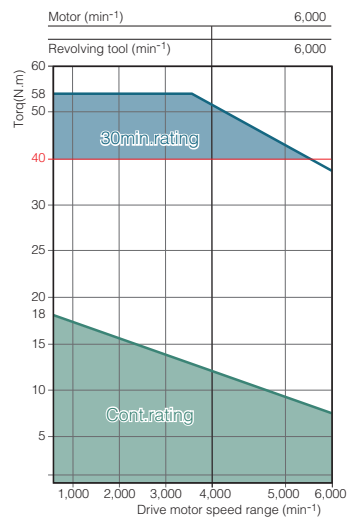

# Thermal revision for "round the clock" accuracy

Temperature variations are constantly measured using sensors throughout the machine with the software, then automatically adjusting the relevant axes accordingly.

Thermal displacement between the X1 axis and SP1 (water soluble coolant used)

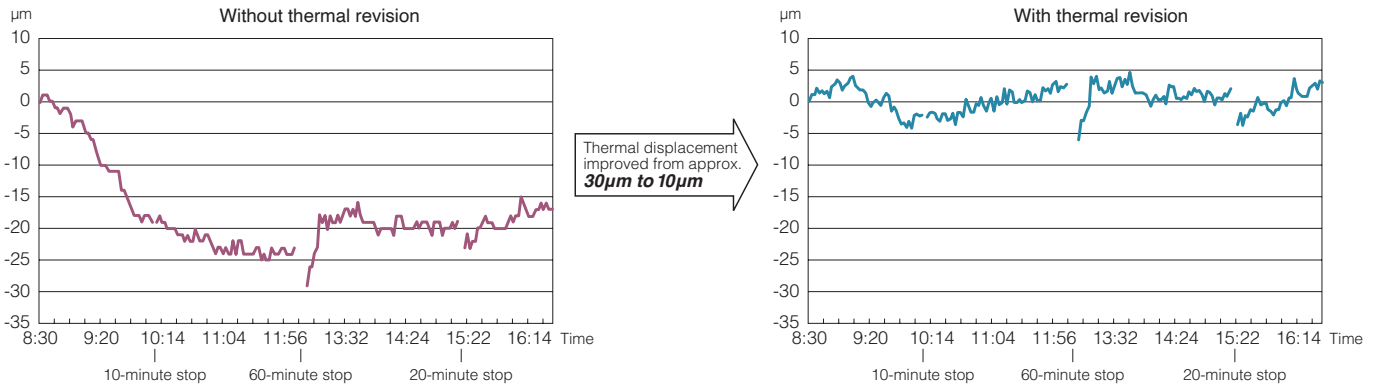


Although the values above are the results of measurement, they are not guaranteed. Values will vary according to the machining conditions, workpiece material and other conditions.


## Examples of simultaneous complex machining

### ABX-THY


#### Centre Support

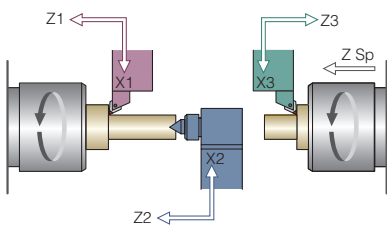

#### Drilling & tapping

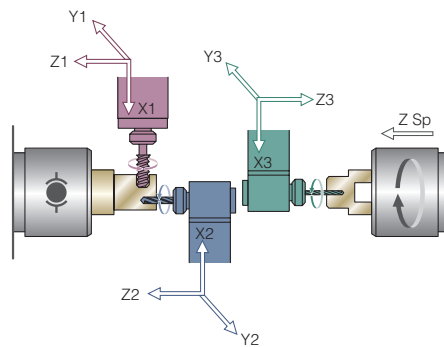


#### Simultaneous machining

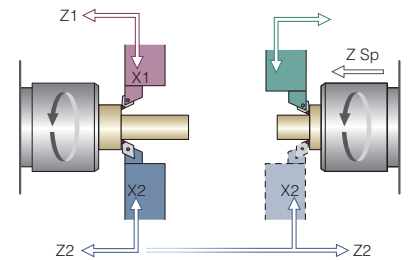


### ABX-SYY


#### Centre support

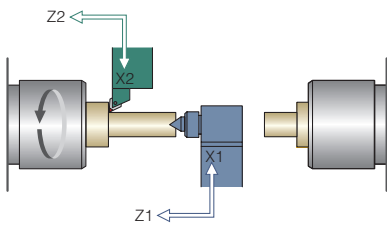

#### Long shaft machining

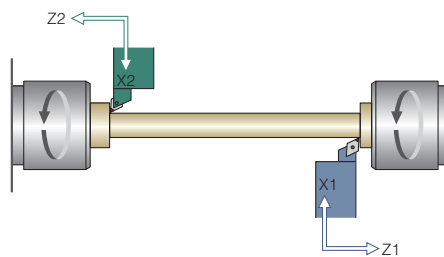

#### Simultaneous machining

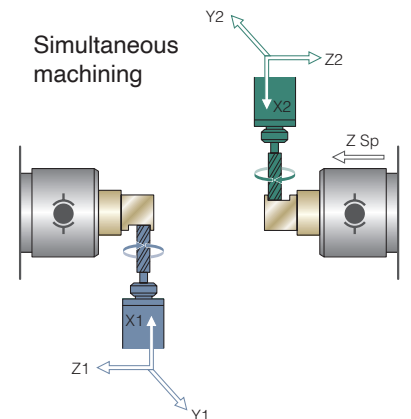

## Options



#### Tool setter

Tool geometry can be accurately measured via the optional touch probe for both OD & ID tooling. The unit is removable via a magnetic coupling.



#### Chip conveyor

Chip conveyors are available for different types of chip, enabling enhanced unmanned running.




#### Parts catcher Parts conveyor

A fully programmable servo driven parts catcher can collect parts from both spindles and safely unload them via a parts conveyor.




# Support screens




## Block skip

Up to 9 individual block skips are available.




## Machining data

Entering the machining length and position of the cut-off here makes it easier to measure geometry offsets and to mount tools.




## Tool setting

Used to measure geometry offsets. It can also be used for tool mounting support, to ensure that the overhang of all tools is fixed at a constant value.




## Tool counter

Used to simply set tool counters and corresponding offset values for each tool. You can also enter wear offsets.




## Cycle time

Automatically measures the proportion of cutting and non cutting time per cycle.




## Tool monitoring (option device)

Allows the user to set limit values for load on individual tools. This can help to prevent damage to tools by automatically stopping the machine if the tool load increases.




## Automatic running monitor (Spindle/ revolving tools) (axis)

Allows you to check the status of the spindle during automatic running and feed axes during automatic running.




## Start condition

Displays information on the start conditions for automatic running.




## Spindle and revolving tool unit

Allows you to set the rotational speed (in manual operation) of the spindle and revolving tools, and to set the spindle override.




## Maintenance

Used to turn the settings for maintenance ON and OFF.




## C1 Zero point adjust mode

Used to adjust the C axis zero point; the screen displays the zero point adjustment instructions.




## Turret Maintenance

Used to adjust the turret zero point; the screen displays the zero point adjustment instructions.

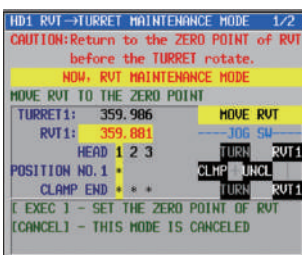


## Revolving tool adjustment

Used to adjust the revolving tool zero point; the screen displays the zero point adjustment instructions.




## Spindle phase Synchronization adjustment

Allows simple adjustment of spindle to spindle angular adjustment through on screen guides.



## Manual operation

Displays the zero point lamp status and the machine coordinate of each axis.




## Option device

Used to select an auxiliary device (option) such as a part catcher to be operated manually.






# Tooling system

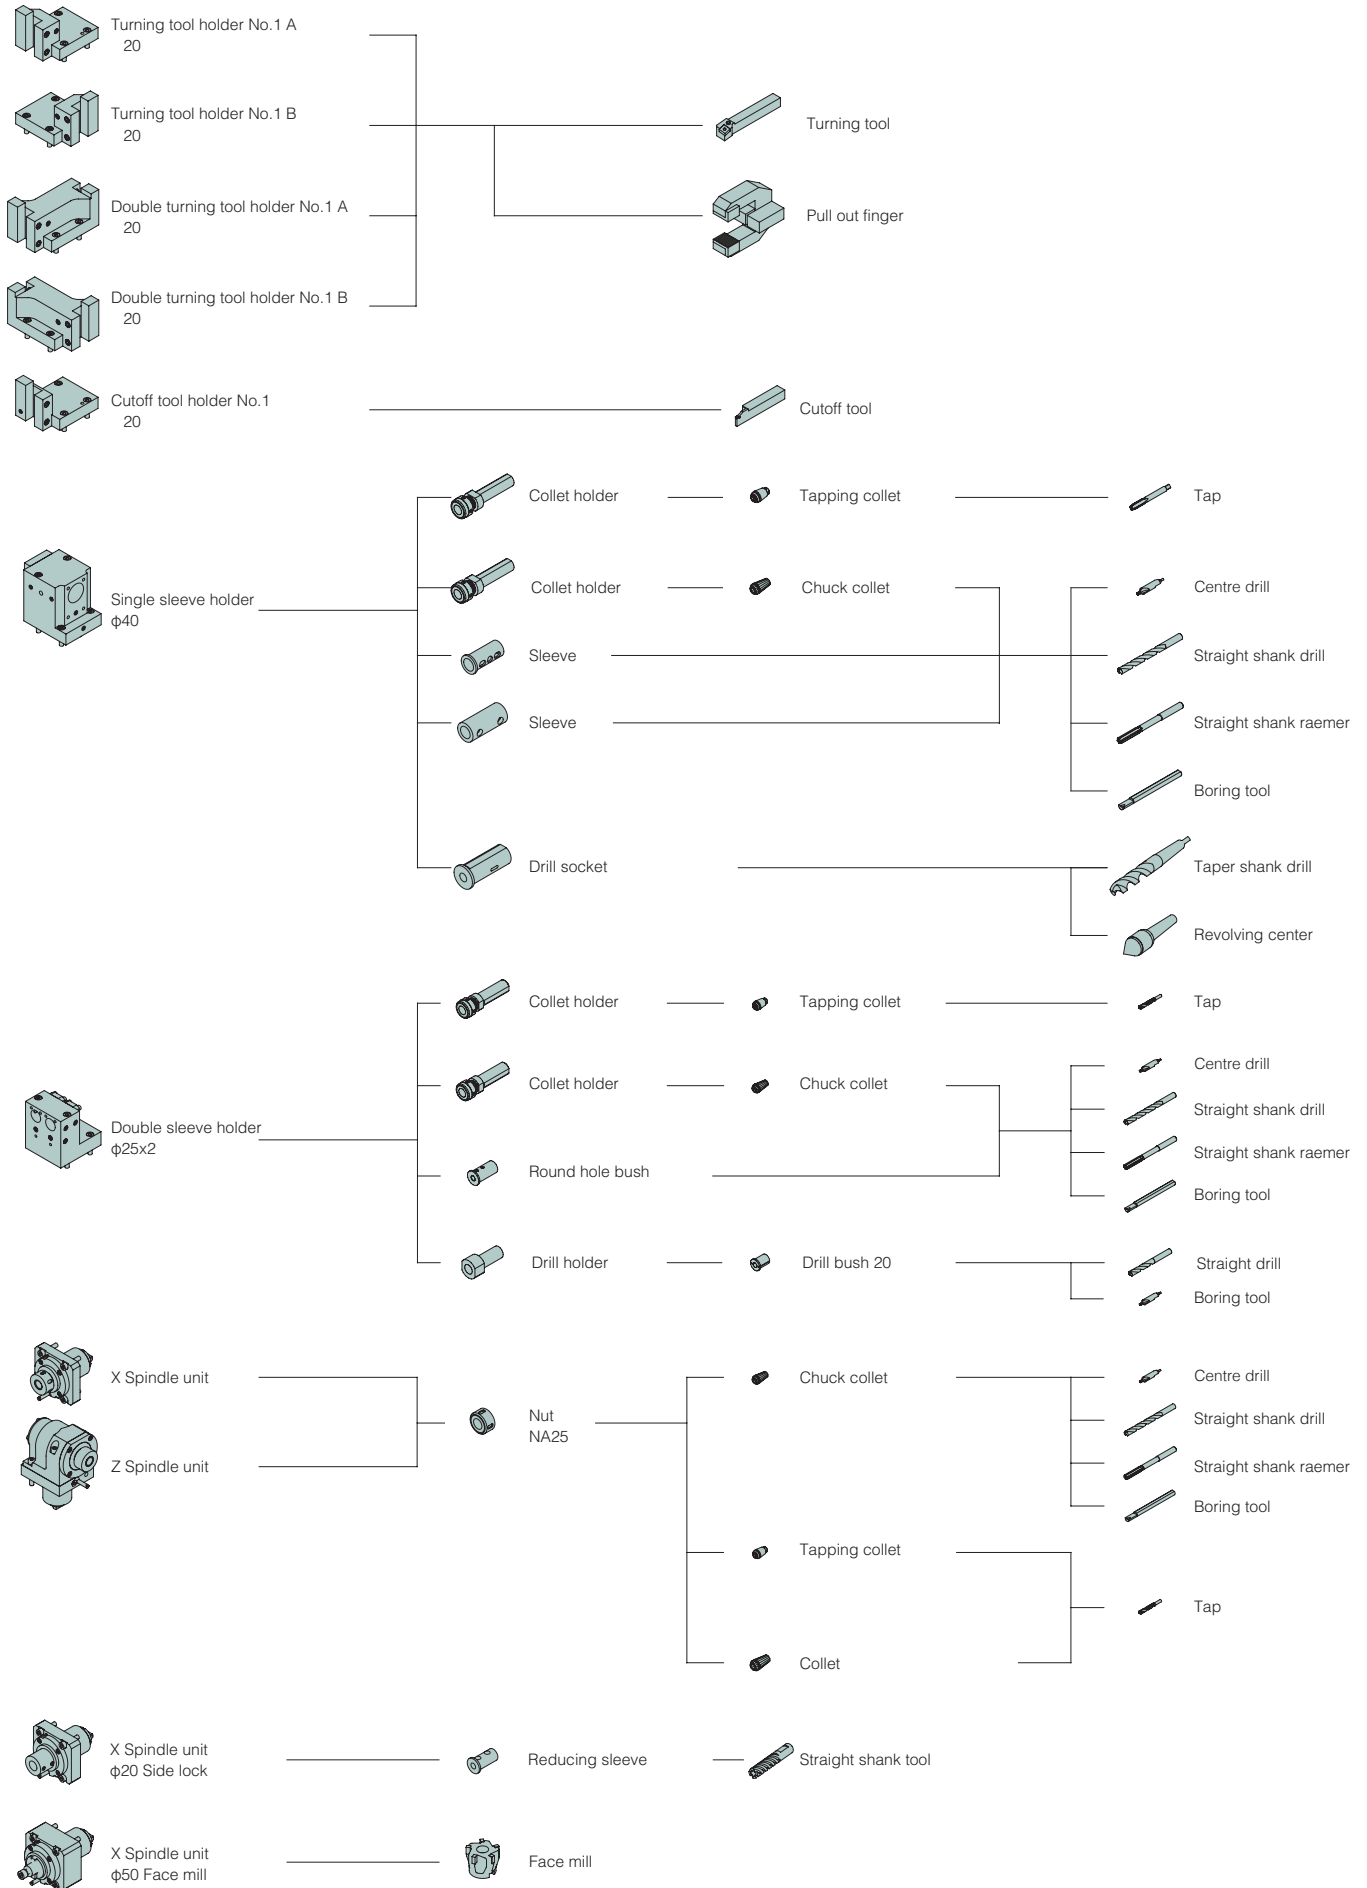



# External view

Common

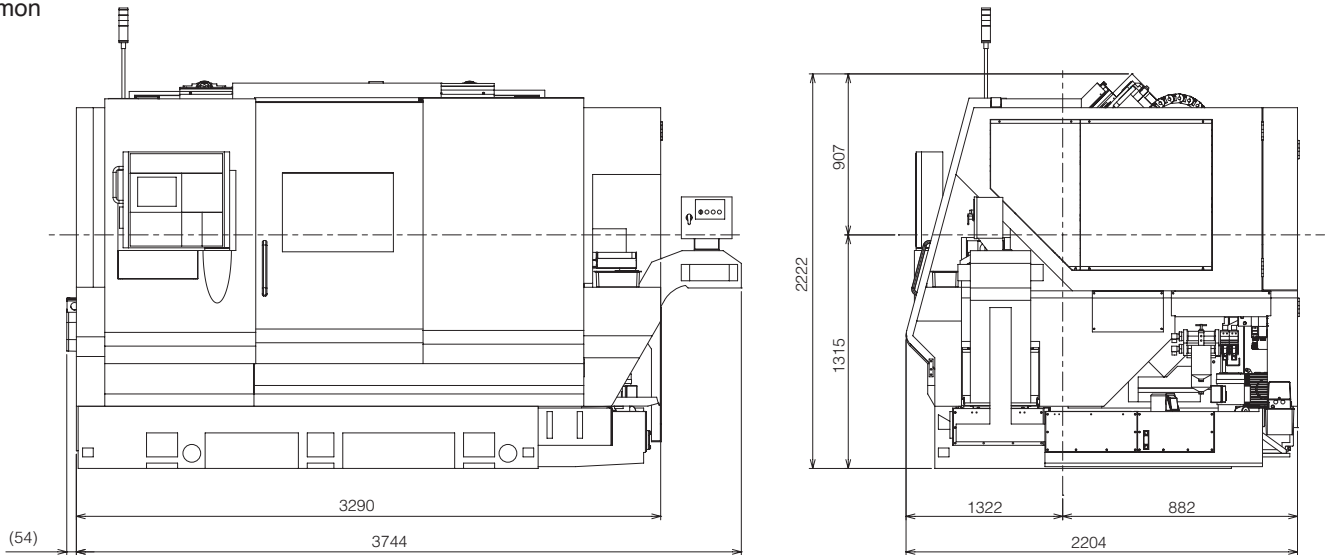

## NC Specifications

ABX-THY2	FS.31i-B 3 system
Axial control	HD1: X1,Z1,Y1,C1,A1,E1(T1) HD2: X2,Z2,Y2,(C2),A2,E2(T2) HD3: X3,Z3,Y3,C3,A3,E3(T3),PC,ZS
Minimum setting unit	0.001mm, 0.0001inch, 0.001deg
Interpolation functions	G01, G02, G03
Thread cutting	G32, G33, G92
Rapid feed override	0-100%
Feed rate override	0-150%
Feed rate per minute/Feed rate	G98/ G99
Single form fixed cycle	G90, G92, G94
Program storage capacity	The sum total of 3 systems : 128KB (320 m)
Registered program number (Extension)	The sum total of 3 systems : 250 programs
Spindle function	S4 digit
Constant surface speed control	G96
Tool function	T AABB (AA =Tool number and geometry, BB =Wear offset number)
Tool compensation number	32 pieces, 96 pieces (3 systems)
Automatic operation	Single-cycle automatic operation, Single block, Block delete, Machine lock, Optional block skip, Dry run, Feed hold
Data input-and-output function	RS -232C, Memory card interface
Others	10.4" color LCD, Feed axis absolute position detection unit, Synchronization / mixture control, Cs outline control, Many article thread cutting, Continuation thread cutting, Polar coordinate interpolation, A decimal point input Programmable date input G10, Automatic coordinate system setup, Custom macro, Program protection, Manual handle retrace, Self-diagnostic function, etc.
Options	Superimposed control, Variable lead thread cutting, Cylindrical interpolation, Helical interpolation, Inch / metric change, Chamfering /Corner R control, Drawing size direct input, Canned cycles for drilling, Multiple repetitive cycles, Program storage capacity addition, Program simultaneous edit number, Spindle rigid tap, Revolving tool rigid tap, Polygon cutting, Tool compensation number addition, Amount measured value of tool compensation direct input, Tool life management, Tool nose radius compensation, Run hour and the number of parts display, Graphic display,

ABX-SYY2	FS.31i -B 2 system
Axial control	HD1: X1, Z1, Y1, C1, A1, E1 (T1), (ZS) HD2: X2, Z2, Y2, C2, A2, E2 (T2), PC, ZS
Minimum setting unit	0.001 mm, 0.0001 inch, 0.001 deg
Interpolation functions	G01, G02, G03
Thread cutting	G32, G33, G92
Rapid feed override	0-100%
Feed rate override	0-50%
Feed rate per minute/Feed rate	G98 /G99
Single form fixed cycle	G90, G92, G94
Program storage capacity	The sum total of 2 systems : 64KB (160 m)
Registered program number (Extension)	The sum total of 2 systems : 125 programs
Spindle function	S4 digit
Constant surface speed control	G96
Tool function	T AABB (AA =Tool number and geometry, BB =Wear offset number)
Tool compensation number	32 pieces, 64 pieces(2 systems)
Automatic operation	Single -cycle automatic operation, Single block, Block delete, Machine lock, Optional block skip, Dry run, Feed hold
Data input-and-output function	RS -232C, Memory card interface
Others	10.4" color LCD, Feed axis absolute position detection unit, Synchronization /mixture control, Cs outline control, Many article thread cutting, Continuation thread cutting, Polar coordinate interpolation, A decimal point input Programmable date input G10, Automatic coordinate system setup, Custom macro, Program protection, Manual handle retrace, Self-diagnostic function, etc.
Options	Superimposed control, Variable lead thread cutting, Cylindrical interpolation, Helical interpolation, Inch / metric change, Chamfering/Corner R control, Drawing size direct input, Canned cycles for drilling, Multiple repetitive cycles, Program storage capacity addition, Program simultaneous edit number, Spindle rigid tap, Revolving tool rigid tap, Polygon cutting, Tool compensation number addition, Amount measured value of tool compensation direct input, Tool life management, Tool nose radius compensation, Run hour and the number of parts display, Graphic display,

# Machine specification

Item	<b>ABX-THY2</b>		<b>ABX-SYY2</b>		
		51THY2	64THY2	51SYY2	64SYY2
<b>Machining capacity</b>					
Maximum work length	SP1	125 mm	118 mm	125 mm	118 mm
	SP2	125 mm			
<b>Maximum work diameter</b>					
for bar work	SP1	51 mm Dia.	64 mm Dia.	51 mm Dia.	64 mm Dia.
	SP2	φ51mm			
for power chuck	SP1	165 mm Dia.	---	φ165 mm	---
	SP2	φ165mm			
<b>Spindle</b>					
Number of spindles		2			
Spindle speed	SP1	50 - 5,000 min <sup>-1</sup>	40 - 4,000min <sup>-1</sup>	50 - 5,000min <sup>-1</sup>	40 - 4,000 min <sup>-1</sup>
	SP2	50 - 5,000 min <sup>-1</sup>			
Inner diameter of draw tube	SP1	52 mm Dia.	65.5 mm Dia.	52 mm Dia.	65.5 mm Dia.
	SP2	φ52mm			
<b>Chucking system</b>					
Type of collet chuck	SP1	S collet system	S collet system	S collet system	S collet system
		H-S22 / DIN177E	H-S26 / DIN185E	H-S22 / DIN177E	H-S26 / DIN185E
	SP2	S collet system			
		H-S22 / DIN177E			
Type of Power chuck	SP1	6" Hydraulic chuck			
	SP2	6" Hydraulic chuck			
<b>Turret</b>					
Number of turrets		3		2	
Turret stations	HD1, HD2, HD3	12 st.			
Tool shank size	HD1, HD2, HD3	20 mm Sq.			
I.D tool hole size	HD1, HD2, HD3	25 mm Dia. /40mm Dia.			
Index time	HD1, HD2, HD3	0.25 SEC/ 1POS			
Rapid traverse rate	HD1	X1	16 min <sup>-1</sup>		
	Z1	20min <sup>-1</sup>	30 min <sup>-1</sup>		
	Y1	12min <sup>-1</sup>			
	HD2	X2	16 min <sup>-1</sup>		
	Z2	30min <sup>-1</sup>	20 min <sup>-1</sup>		
	Y1	12min <sup>-1</sup>			
	HD3	X3	16 min <sup>-1</sup>		---
	Z3	20min <sup>-1</sup>	---		
	Y3	12min <sup>-1</sup>	---		
	SP2	Zs	30 min <sup>-1</sup>		
<b>Revolving tool (Option)</b>					
Number of revolving tools	HD1, HD2, HD3	12 (MAX.36)		12 (MAX.24)	
Maximum spindle speed		6,000 min <sup>-1</sup>			
Machining capacity	Drilling	MAX. 20 Dia.			
Tapping	MAX. M14×2				
End mill	MAX.φ16				
<b>Tank capacity</b>					
Hydraulic tank capacity	10 L				
Lubricating tank capacity	4 L				
Coolant tank capacity	400 L				
<b>Machine dimensions</b>					
Machine height	2,222 mm				
<b>Floor space</b>					
Machine weight	11,350 Kg		11,350 Kg		10,600 Kg
Spindle motor	AC 15/ 11 Kw				
	SP2	AC 7.5/5.5Kw			
Revolving tool motor	HD1, 2, 3	AC 4.5 Kw			
<b>Power supply</b>					
Voltage	AC 200/ 220 V ± 10% 50/60Hz±1Hz				
Capacity	49 KVA			48 KVA	
Air supply	0.5 MPa (5 kgf/ cm <sup>2</sup> )				
Fuse	150 A			150 A	
<b>Others</b>					
Pneumatic, Spindle brake, Revolving tools and driving unit, Thermo revision, Splash guard interlock, High pressure coolant, Work ejector No2, Parts catcher (Servo type).					
<b>Optional accessories</b>					
100V, Collet chuck system, 6" Power chuck, Air blow, No.2 spindle inner high pressure coolant & air blow, Coolant level switch, Automatic power shut-off and extinguisher, Automatic power shut-off, Chip conveyor, Chip box, Parts carrier, Coolant mist collector, Blast-proof dumpers, Tool setter, Signal light (3 steps), Total & preset counter, Bar feeder interface, Filler tube, Spindle inner bushing, Drill breakage detector, etc.					

# CITIZEN

## CITIZEN MACHINERY CO., LTD.

### Japan

Citizen Machinery Co Ltd  
4017-6 Miyota, Miyota-machi, Kitasaku-gun,  
Nagano-ken, 389-0206, Japan

Tel: 81-267-32-5901 Fax: 81-267-32-5908

### Europe - Germany

Citizen Machinery Europe GmbH  
Mettinger Strasse 11, D-73728 Esslingen, Germany

Tel: 49-711-3906-100 Fax: 49-711-3906-106

### Europe - UK

Citizen Machinery UK Ltd  
1 Park Avenue, Bushey, WD23 2DA, UK

Tel: 44-1923-691500 Fax: 44-1923-691599

[www.citizenmachinery.co.uk](http://www.citizenmachinery.co.uk)

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technologies and software. In the event of export, proof of approval to export by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN. CITIZEN is a registered trademark of Citizen Holdings Co., Japan.