

CITIZEN

Miyano



ABX-80

Fixed Headstock Type CNC Automatic Lathe



Latest additions to the ever popular range of ABX models.

Now with the option to have increased spindle capacity to 80mm diameter.

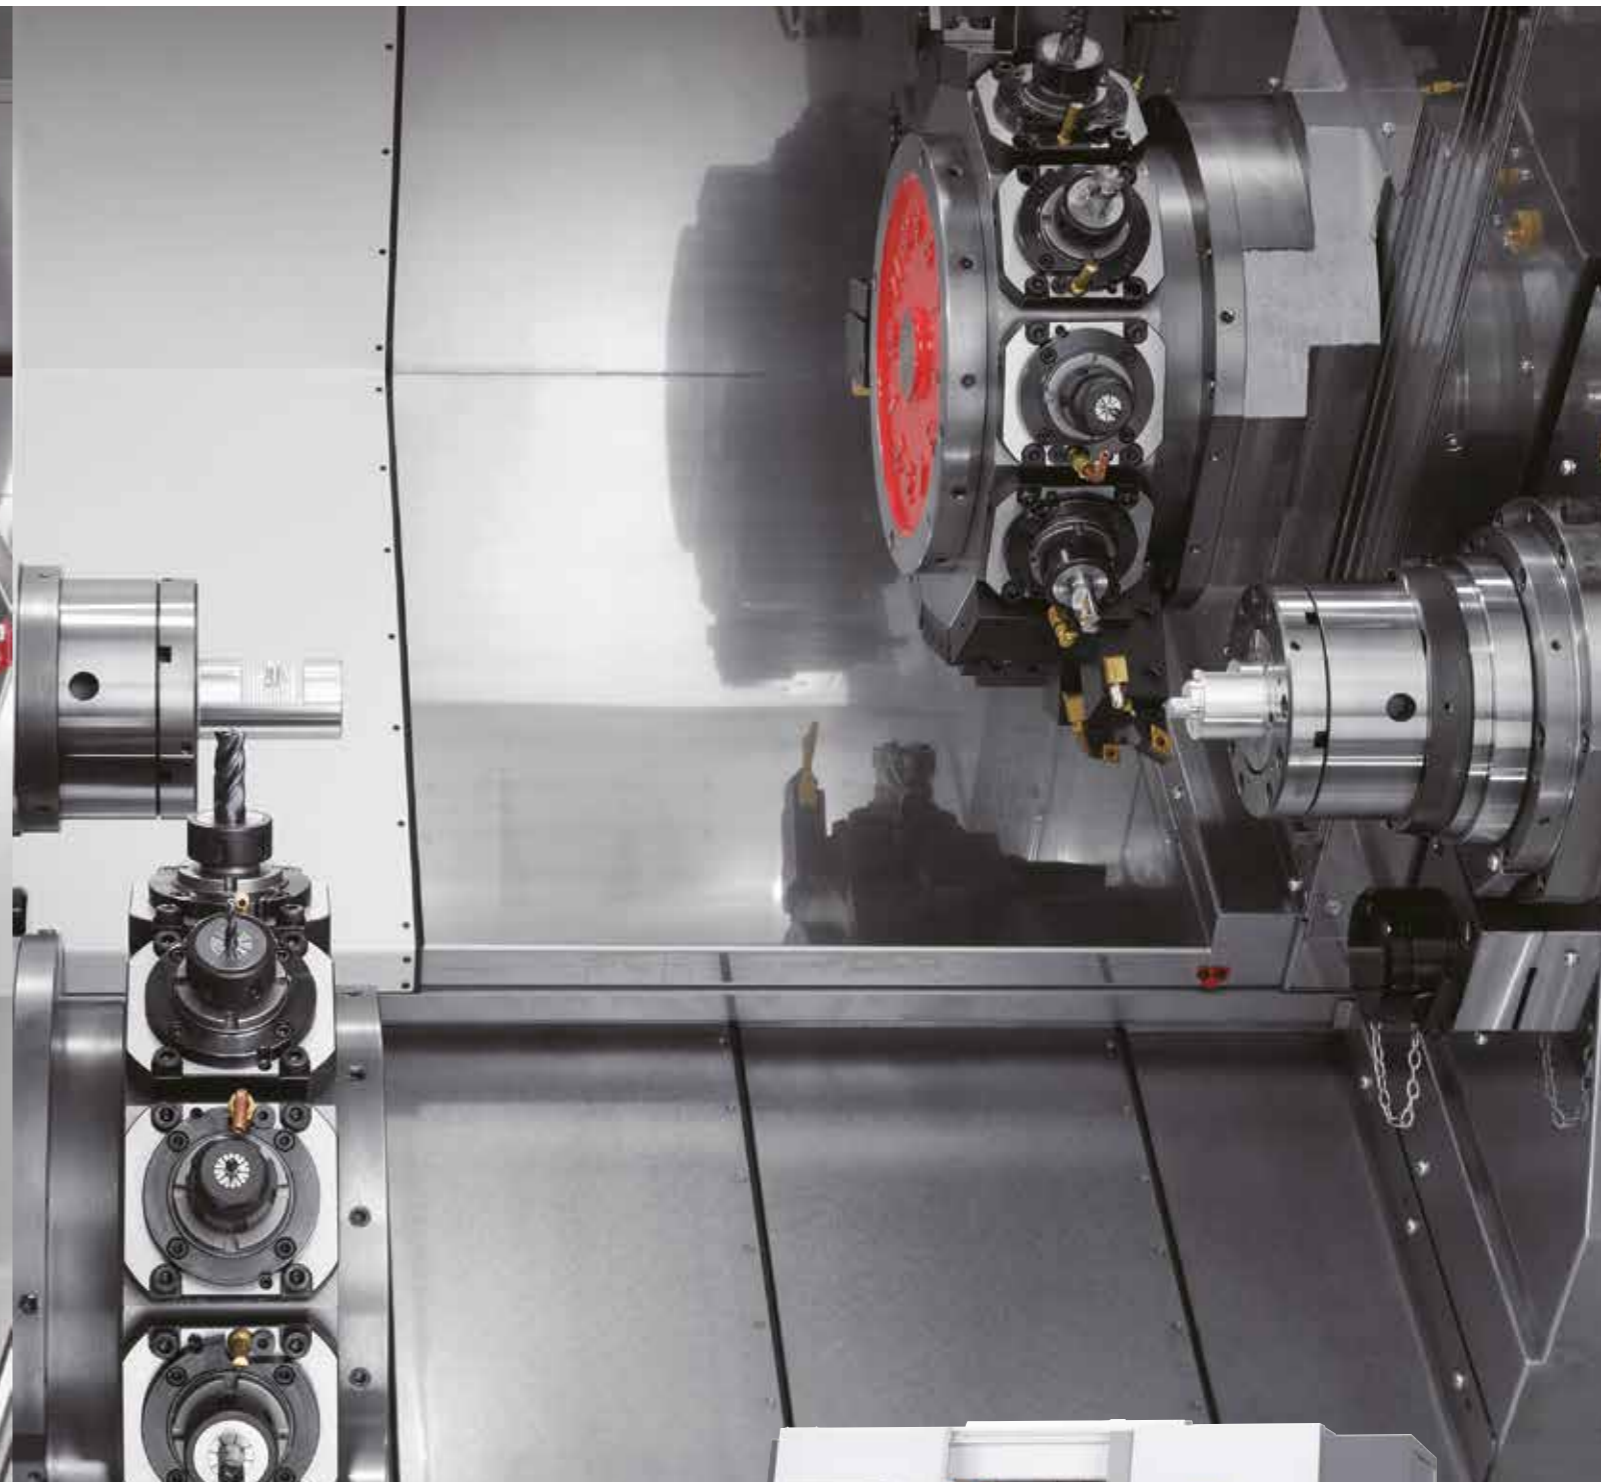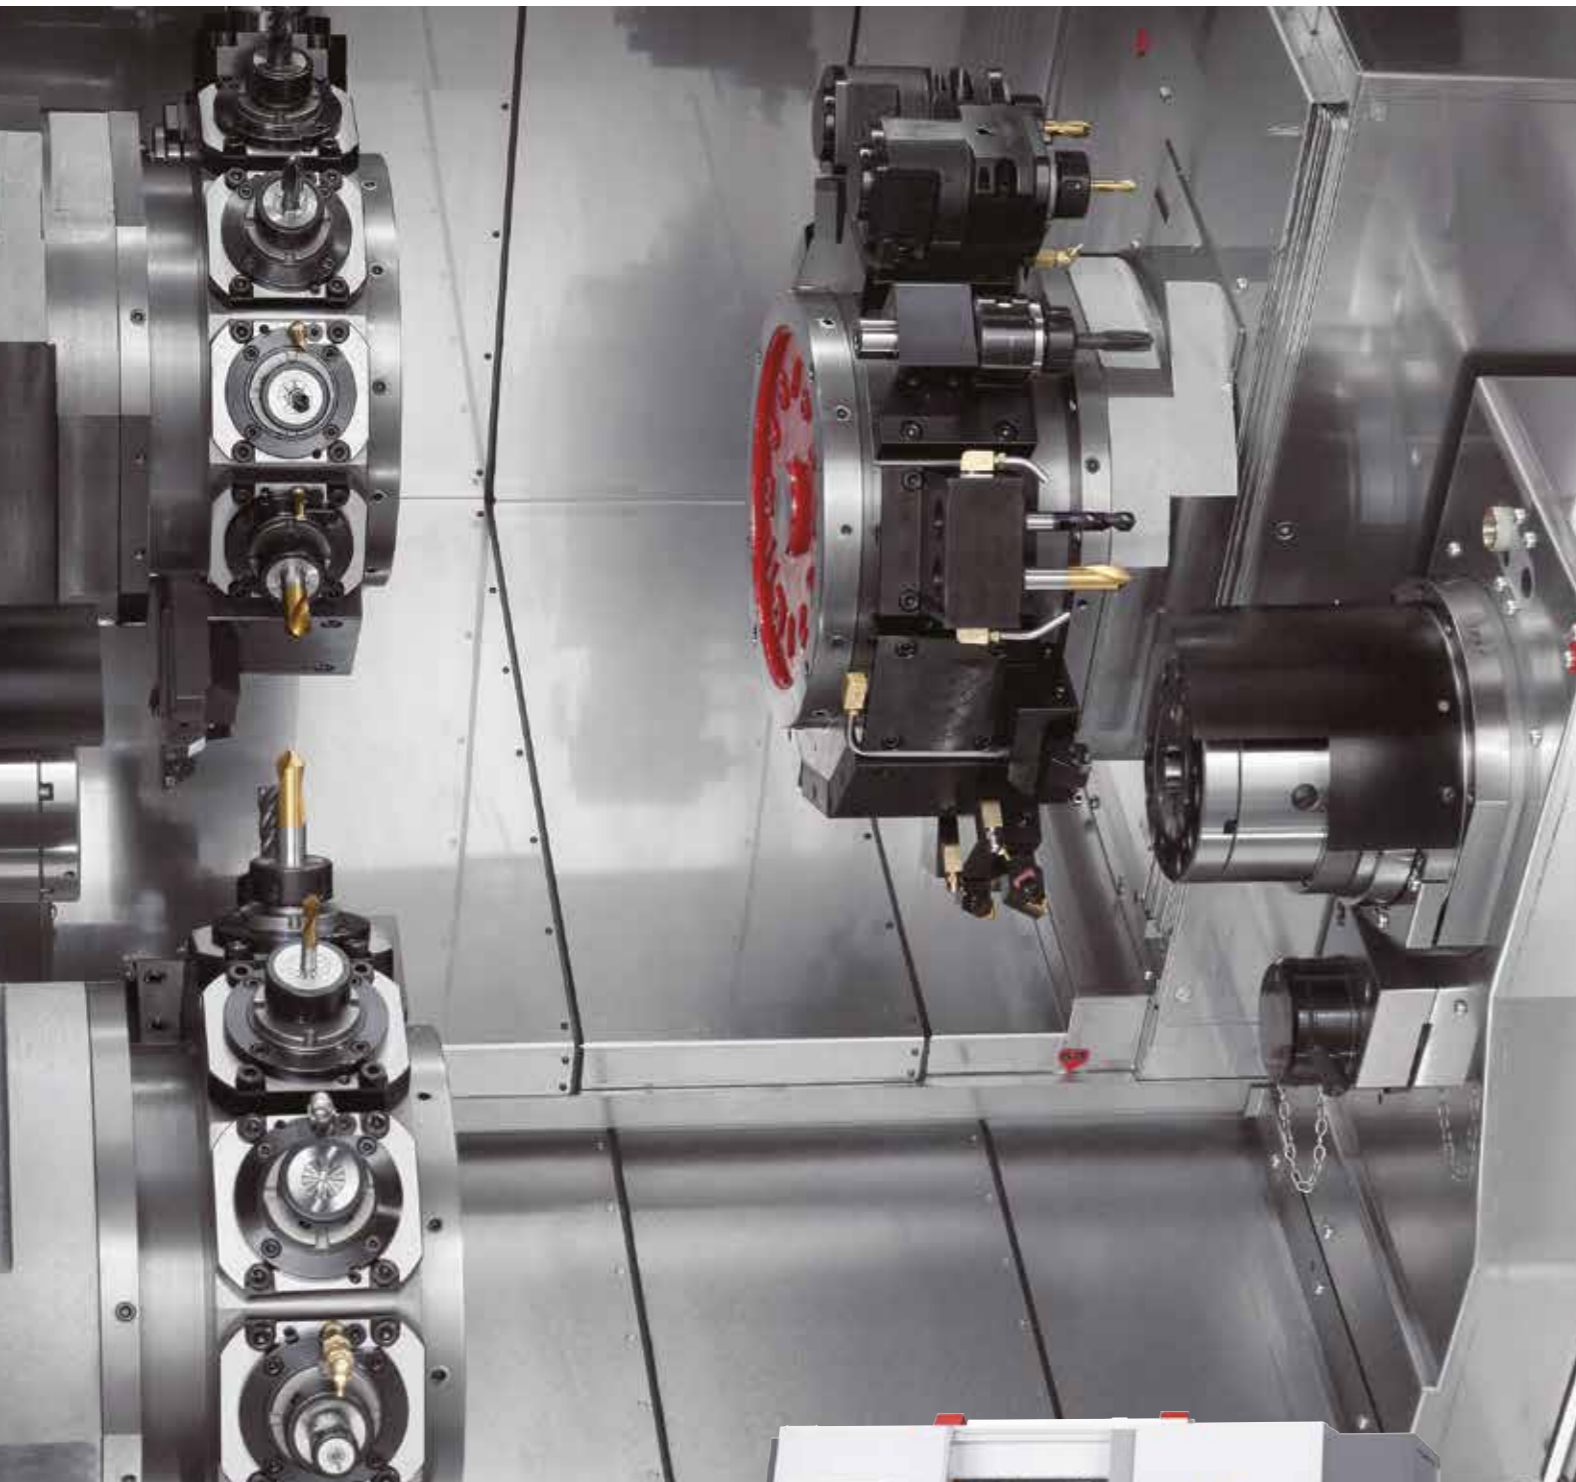

The ultimate from bar work specialist Miyano, the perfect turning centre with three Y axes

THY



A long-stroke, high-spec turning centre with turrets and Y axis at top and bottom

SY Y





THY

Right and left upper turrets equipped with a Y axis, and a lower turret also with a Y axis that can unrestrictedly approach both spindles, enable the ideal process allocation and flexible tooling without any limitations imposed by machining balance.

Three Y axis for ultimate flexibility & high productivity.

Two upper 12 station turrets on box guideways dedicated to each spindle and a lower 12 station turret capable of working on both spindles – all with 80mm of Y axis stroke. Complete flexibility in tandem with Miyanos' world renowned accuracy and rigidity.

High power, high torque (40Nm) power tool capability in any of the 36 turret stations to enable milling capability like a machining centre.



Simultaneous complex machining with three turrets

SYT

Cutting time shortened by simultaneous cutting at left and right with two Y axis.

The ability to machine simultaneously at the left and right spindles using the upper and lower turrets, both featuring a Y-axis function, means that complete front and back machining of products with complex shapes can be accomplished simply and in a short time.

Twin spindle twin turret machining. Two 12 station turrets both capable of working on each spindle either separately or in tandem – both with 80mm of Y axis stroke. Complete flexibility in tandem with Miyanos' world renowned accuracy and rigidity.


High power, high torque (40Nm) power tool capability in any of the 24 turret stations to enable milling capability like a machining centre.




Simultaneous complex machining with two turrets

Basic construction

ABX-THY

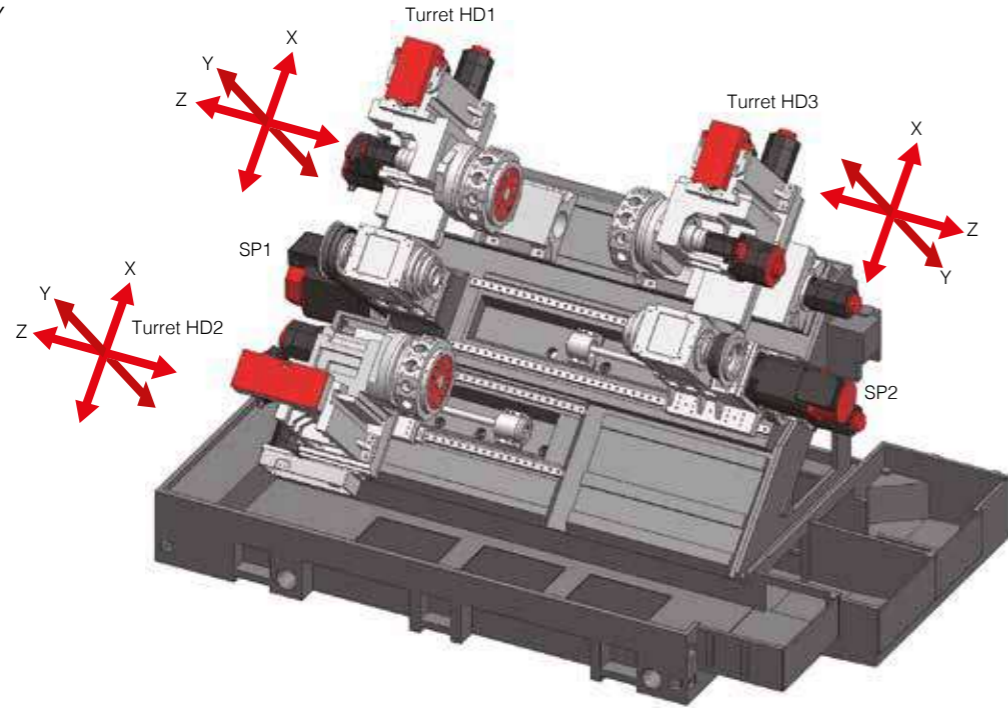

ABX-SYY

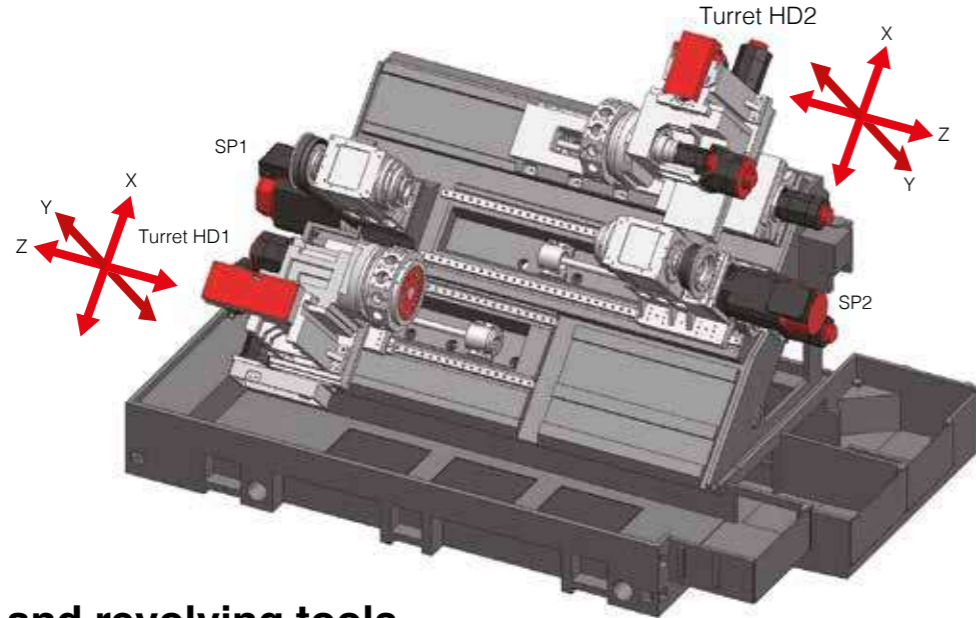

Turret and revolving tools


High-rigidity 12-station turret



40 Nm revolving tools




Revolving tool torque diagram

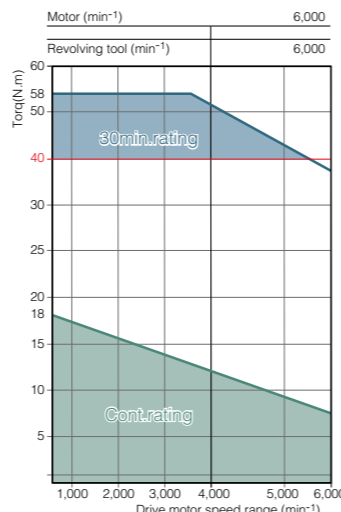

Thermal revision for "round the clock" accuracy

Temperature variations are constantly measured using sensors throughout the machine with the software, then automatically adjusting the relevant axes accordingly.

Thermal displacement between the X1 axis and SP1 (water soluble coolant used)

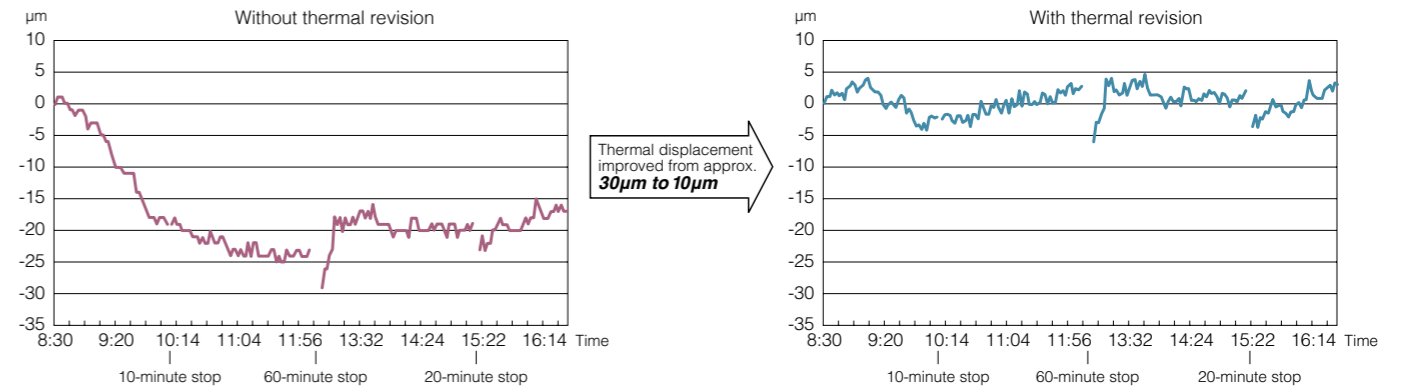


Although the values above are the results of measurement, they are not guaranteed. Values will vary according to the machining conditions, workpiece material and other conditions.


Examples of simultaneous complex machining

ABX-THY


Centre Support

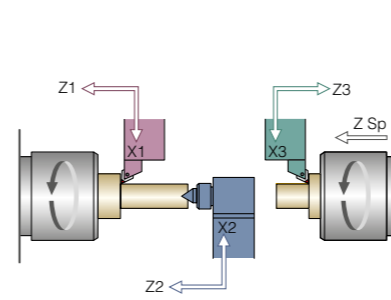

Drilling & tapping

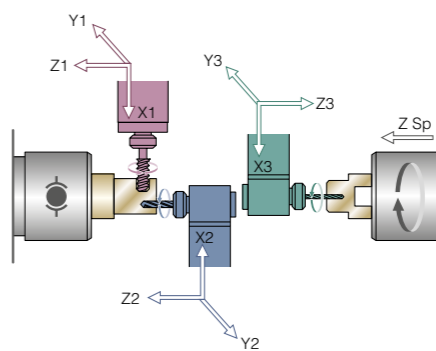


Simultaneous machining

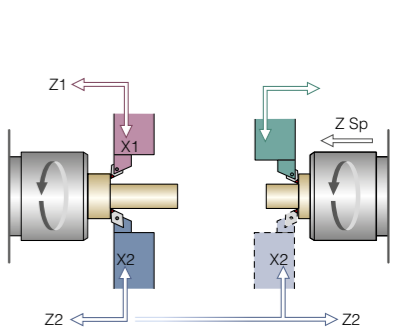


ABX-SYY


Centre support

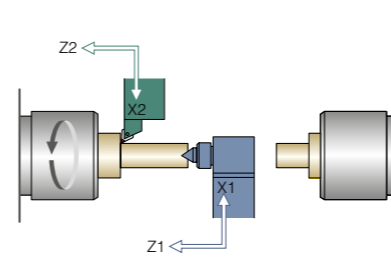

Long shaft machining

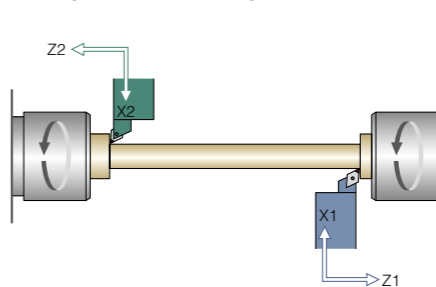

Simultaneous machining

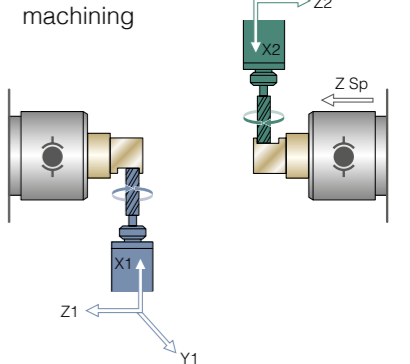

Options



Tool setter
Tool geometry can be accurately measured via the optional touch probe for both OD & ID tooling. The unit is removable via a magnetic coupling.




Chip conveyor
Chip conveyors are available for different types of chip, enabling enhanced unmanned running.




**Parts catcher
Parts conveyor**
A fully programmable servo driven parts catcher can collect parts from both spindles and safely unload them via a parts conveyor.

Tooling system

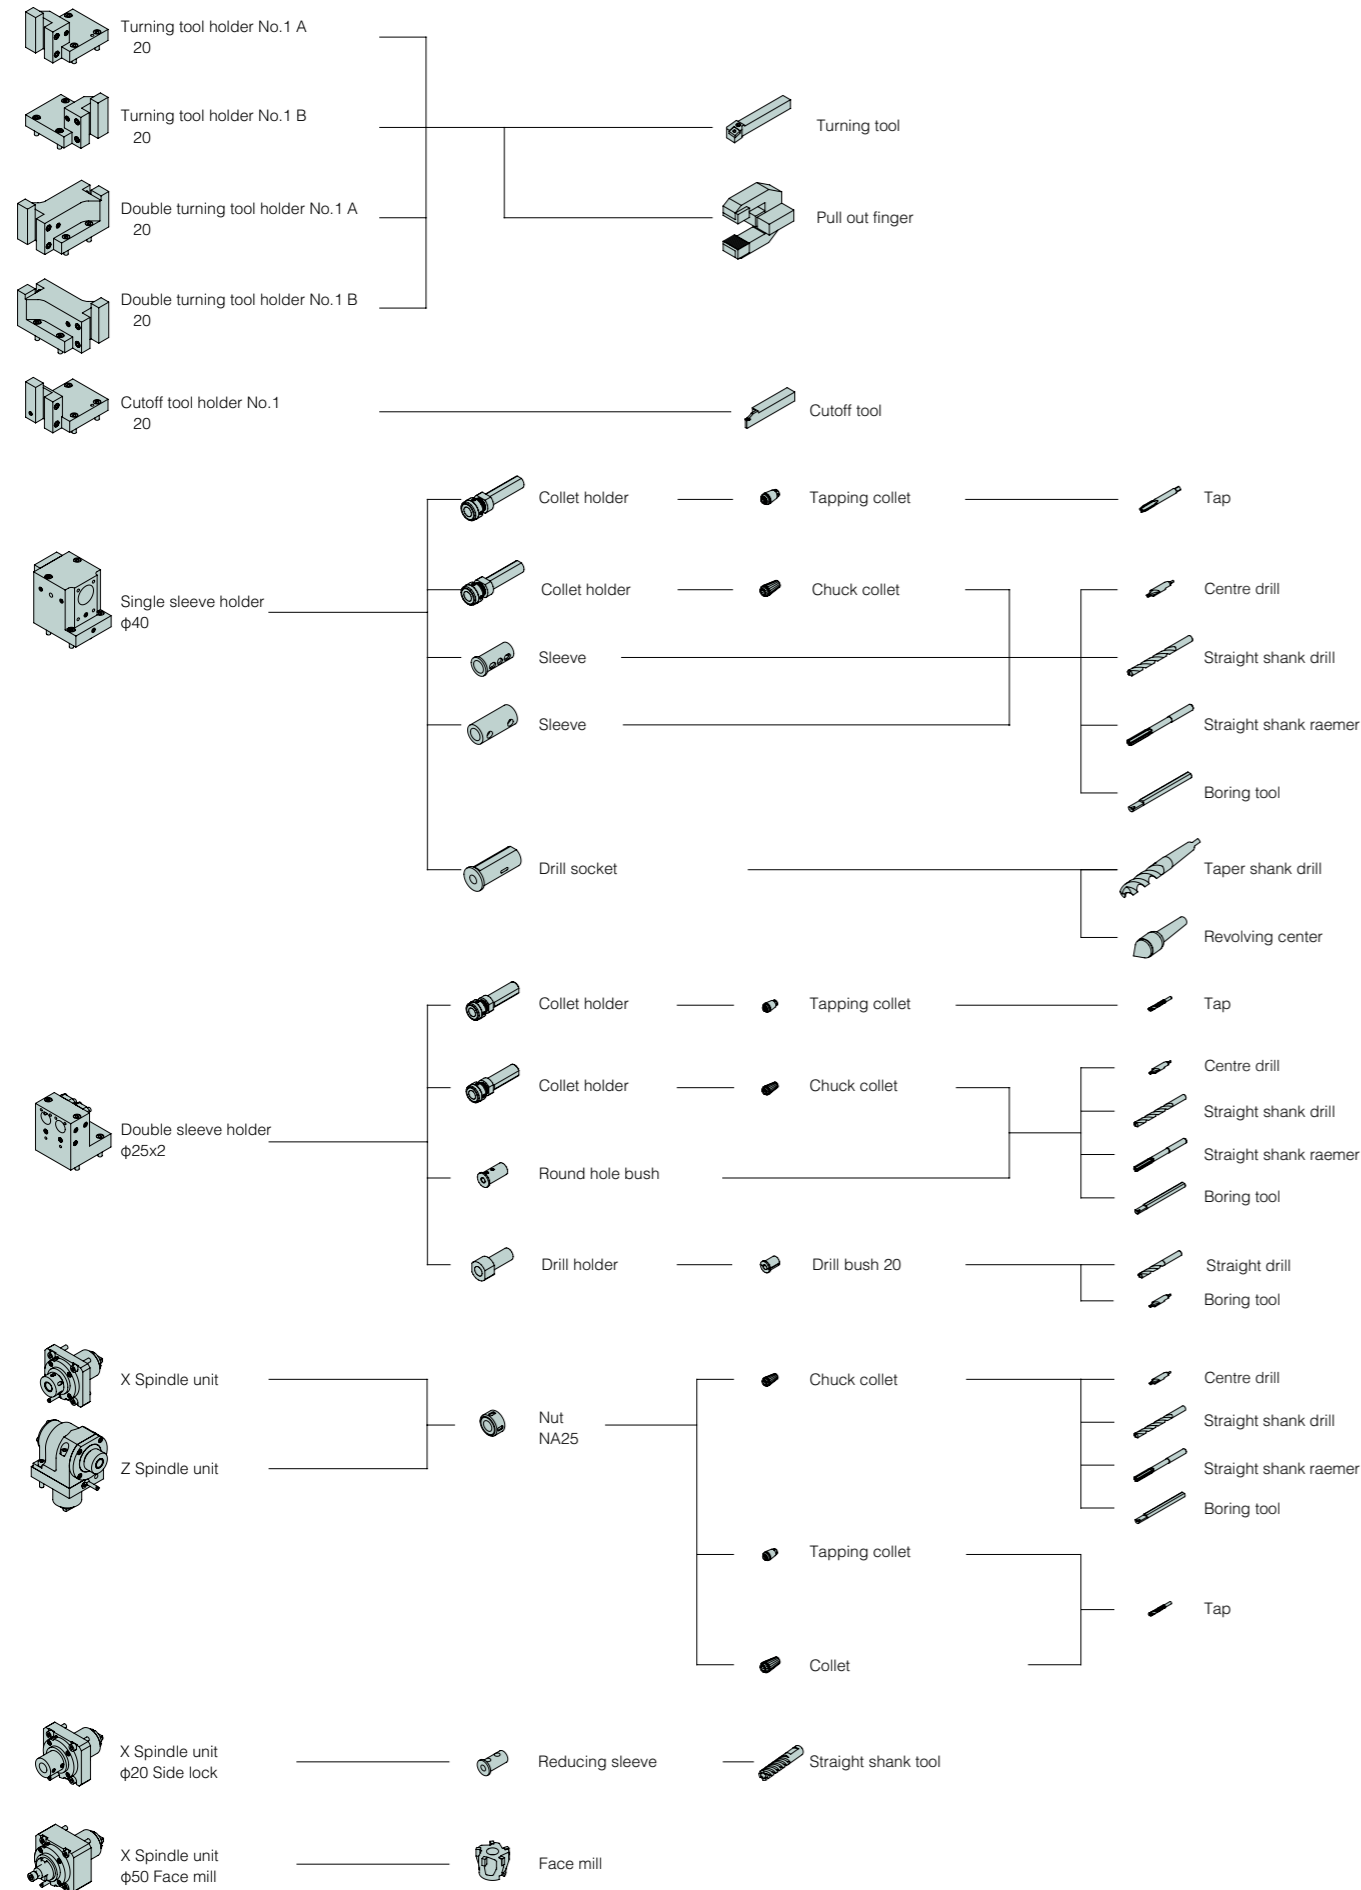

External view

Common

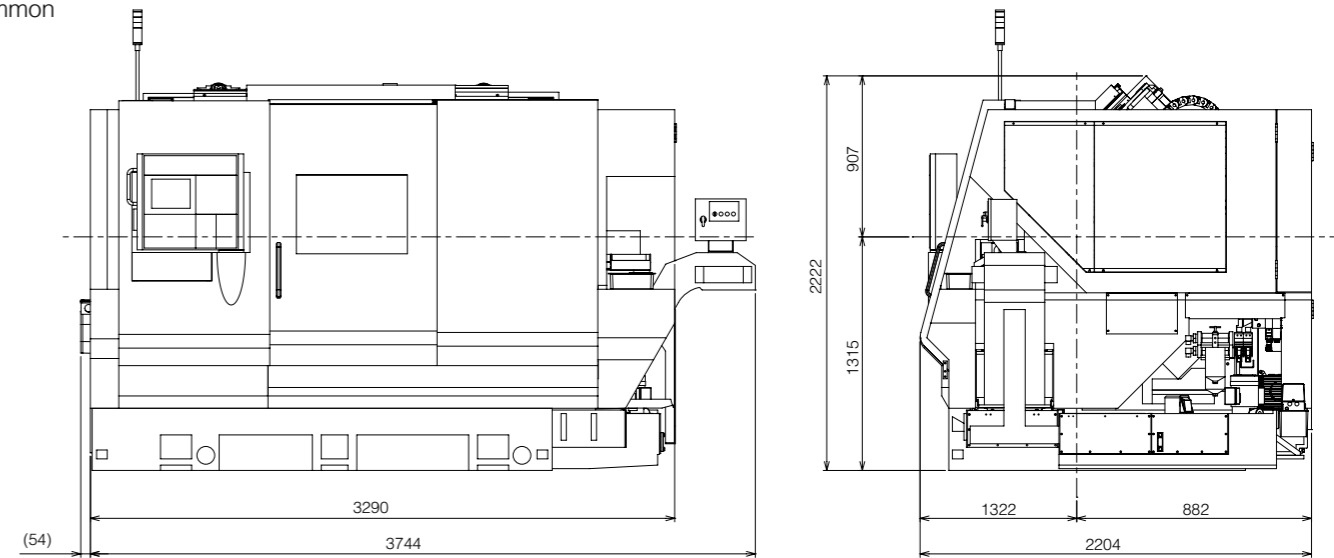

NC Specifications

ABX-THY2	FS.31i-B 3 system	ABX-SYY2	FS.31i-B 2 system
Axial control	HD1: X1,Z1,Y1,C1,A1,E1(T1) HD2: X2,Z2,Y2,(C2),A2,E2(T2) HD3: X3,Z3,Y3,C3,A3,E3(T3),PC,ZS	Axial control	HD1: X1, Z1, Y1, C1, A1, E1 (T1), (ZS) HD2: X2, Z2, Y2, C2, A2, E2 (T2), PC, ZS
Minimum setting unit	0.001mm, 0.0001inch, 0.001deg	Minimum setting unit	0.001 mm, 0.0001 inch, 0.001 deg
Interpolation functions	G01, G02, G03	Interpolation functions	G01, G02, G03
Thread cutting	G32, G33, G92	Thread cutting	G32, G33, G92
Rapid feed override	0-100%	Rapid feed override	0-100%
Feed rate override	0-150%	Feed rate override	0-50%
Feed rate per minute/Feed rate	G98/ G99	Feed rate per minute/Feed rate	G98/ G99
Single form fixed cycle	G90, G92, G94	Single form fixed cycle	G90, G92, G94
Program storage capacity	The sum total of 3 systems : 128KB (320 m)	Program storage capacity	The sum total of 2 systems : 80KB (160 m)
Registered program number (Extension)	The sum total of 3 systems : 250 programs	Registered program number (Extension)	The sum total of 2 systems : 125 programs
Spindle function	S4 digit	Spindle function	S4 digit
Constant surface speed control	G96	Constant surface speed control	G96
Tool function	T AABB (AA =Tool number and geometry, BB =Wear offset number)	Tool function	T AABB (AA =Tool number and geometry, BB =Wear offset number)
Tool compensation number	32 pieces, 96 pieces (3 systems)	Tool compensation number	32 pieces, 80 pieces(2 systems)
Automatic operation	Single-cycle automatic operation, Single block, Block delete, Machine lock, Optional block skip, Dry run, Feed hold	Automatic operation	Single -cycle automatic operation, Single block, Block delete, Machine lock, Optional block skip, Dry run, Feed hold
Data input-and-output function	RS -232C, Memory card interface	Data input-and-output function	RS -232C, Memory card interface
Others	10.4" color LCD, Feed axis absolute position detection unit, Synchronization / mixture control, Cs outline control, Many article thread cutting, Continuation thread cutting, Polar coordinate interpolation, A decimal point input Programmable date input G10, Automatic coordinate system setup, Custom macro, Program protection, Manual handle retrace, Self-diagnostic function, etc.	Others	10.4" color LCD, Feed axis absolute position detection unit, Synchronization /mixture control, Cs outline control, Many article thread cutting, Continuation thread cutting, Polar coordinate interpolation, A decimal point input Programmable date input G10, Automatic coordinate system setup, Custom macro, Program protection, Manual handle retrace, Self-diagnostic function, etc.
Options	Superimposed control, Variable lead thread cutting, Cylindrical interpolation, Helical interpolation, Inch / metric change, Chamfering /Corner R control, Drawing size direct input, Canned cycles for drilling, Multiple repetitive cycles, Program storage capacity addition, Program simultaneous edit number, Spindle rigid tap, Revolving tool rigid tap, Polygon cutting, Tool compensation number addition, Amount measured value of tool compensation direct input, Tool life management, Tool nose radius compensation, Run hour and the number of parts display, Graphic display,	Options	Superimposed control, Variable lead thread cutting, Cylindrical interpolation, Helical interpolation, Inch / metric change, Chamfering/Corner R control, Drawing size direct input, Canned cycles for drilling, Multiple repetitive cycles, Program storage capacity addition, Program simultaneous edit number, Spindle rigid tap, Revolving tool rigid tap, Polygon cutting, Tool compensation number addition, Amount measured value of tool compensation direct input, Tool life management, Tool nose radius compensation, Run hour and the number of parts display, Graphic display,

Machine specification

Item		ABX-THY2	ABX-SYY2
Machining capacity		80THY2	80SYY2
Maximum work length	SP1	125 mm	125 mm
	SP2	125 mm	
Maximum work diameter			
for bar work	SP1	80 mm Dia.	80 mm Dia.
	SP2	ø51mm	
for power chuck	SP1	165 mm Dia.	φ165mm
	SP2	ø165mm	
Spindle			
Number of spindles		2	
Spindle speed	SP1	50 - 2,750 min ⁻¹	50 - 2,750min ⁻¹
	SP2	50 - 5,000 min ⁻¹	
Inner diameter of draw tube	SP1	82 mm Dia.	82 mm Dia.
	SP2	φ52mm	
Chucking system	SP1, SP2	Hydraulic cylinder	
Type of collet chuck	SP1	S collet system	
		DIN190E	DIN190E
	SP2	DIN177E	
Type of Power chuck	SP1	6" Hydraulic chuck	
	SP2	6" Hydraulic chuck	
Turret			
Number of turrets		3	2
Turret stations	HD1, HD2, HD3	12 st.	
Tool shank size	HD1, HD2, HD3	20 mm Sq.	
I.D tool hole size	HD1, HD2, HD3	25 mm Dia. /40mm Dia.	
Index time	HD1, HD2, HD3	0.25 SEC/ 1POS	
Rapid traverse rate	HD1	X1	16 min ⁻¹
		Z1	20 min ⁻¹
		Y1	12 min ⁻¹
	HD2	X2	16 min ⁻¹
		Z2	30 min ⁻¹
		Y2	12 min ⁻¹
	HD3	X3	16 min ⁻¹
		Z3	20 min ⁻¹
		Y3	12 min ⁻¹
	SP2	Zs	30 min ⁻¹
Revolving tool (Option)			
Number of revolving tools	HD1, HD2, HD3	12 (MAX.36)	12 (MAX.24)
Maximum spindle speed		6,000 min ⁻¹	
Machining capacity	Drilling	MAX. 20 Dia.	
Tapping	MAX. M14×2		
End mill	MAX.φ16		
Tank capacity			
Hydraulic tank capacity		10 L	
Lubricating tank capacity		4 L	
Coolant tank capacity		400 L	
Machine dimensions			
Machine height		2,222 mm	
Floor space		3,290 × 2,204 mm	
Machine weight		11,350 Kg	10,600 Kg
Spindle motor	SP1	AC 15/ 11 Kw	
	SP2	AC 7.5/5.5Kw	
Revolving tool motor	HD1, 2, 3	AC 4.5 Kw	
Power supply			
Voltage		AC 200/ 220 V ± 10% 50/60Hz±1Hz	
Capacity		49 KVA	48 KVA
Air supply		0.5 MPa (5 kgf/ cm ²)	
Fuse		150 A	150 A
Others			
Pneumatic, Spindle brake, Revolving tools and driving unit, Thermo revision, Splash guard interlock, High pressure coolant, Work ejector No2, Parts catcher (Servo type).			
Optional accessories			
100V, Collet chuck system, 6" Power chuck, Air blow, No.2 spindle inner high pressure coolant & air blow, Coolant level switch, Automatic power shut-off and extinguisher,			
Automatic power shut-off, Chip conveyor, Chip box, Parts carrier, Coolant mist collector, Blast-proof dumpers, Tool setter, Signal light (3 steps), Total & preset counter,			
Bar feeder interface, Filler tube, Spindle inner bushing, Drill breakage detector, etc.			

CITIZEN

CITIZEN MACHINERY CO., LTD.

Japan

Citizen Machinery Co Ltd
4017-6 Miyota, Miyota-machi, Kitasaku-gun,
Nagano-ken, 389-0206, Japan

Tel: 81-267-32-5901 Fax: 81-267-32-5908

Europe - Germany

Citizen Machinery Europe GmbH
Mettinger Strasse 11, D-73728 Esslingen, Germany

Tel: 49-711-3906-100 Fax: 49-711-3906-106

Europe - UK

Citizen Machinery UK Ltd
1 Park Avenue, Bushey, WD23 2DA, UK

Tel: 44-1923-691500 Fax: 44-1923-691599

www.citizenmachinery.co.uk

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technologies and software. In the event of export, proof of approval to export by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN. CITIZEN is a registered trademark of Citizen Holdings Co., Japan.