


# Thermal Systems Duplex Rail Connector



The new Duplex rail connector can be used to connect two products, which are equipped with the asa rail system. A connection of two standard rail system coolers can be very beneficial to easily double the cooling performance, while using the same parts. The logistic and documentation work can be minimized at the OEM's premise as well as at the end customers belongings (e.g. manuals, spare part lists,...). Contact us to discover the full potential and available options for this system, [support@asahydraulik.com](mailto:support@asahydraulik.com)

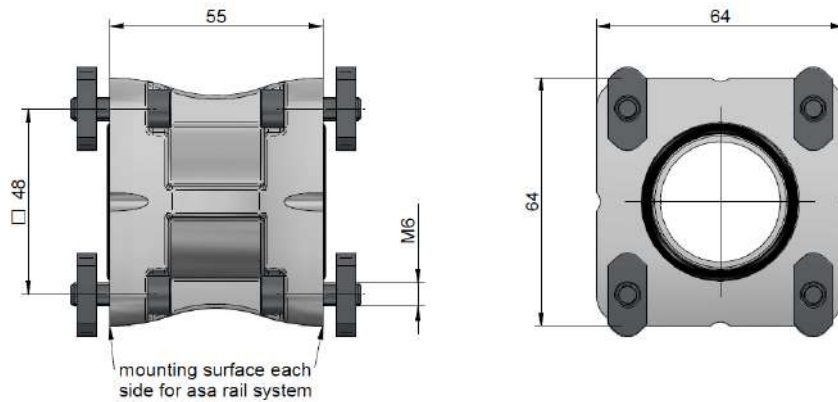

## Technical Data

order number	description	connector material	O-ring	weight
				[kg]
III / SF-15032K	connector III rail duplex kit	aluminium	NBR, 35 x 3 mm	0,80kg

## Content

connector	2x
O-ring	4x
screw M6x20	16x
slot nut	16x

## Fits On Cooler Type

11, 05, 07, 11, 13, 16, 21, 25, 36



Typical connection application:

requires  
2 x Standard Rail system coolers  
1 x ILLZSETSG25  
1 x ILLZSET5032K



This data sheet and the corresponding scale drawings are to be used as a general guide and a technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, the characteristic dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, non-representative drawings, omissions or other results therefrom. Any cooling performance and general technical values indicated in this catalogue are measured at a test bench according to standard test procedures or calculated, based on such tests. Due to different conditions in testing and operation environments the performance may also vary by ±15%, because there is no standardized testing procedure, used by different manufacturers, to give different results. There is no recommendation to be checked under the system operation conditions. This is also true for vibrations and mechanical stress as well as for pressure peaks and thermo, pressure and any other relevant factors. General tolerances according to DIN ISO 2768-M, general tolerances for coated parts according to DIN ISO 8062-3 (DIN 1026-10), tolerances for rubber parts are according to ISO 3302-1 to 306 M4-F100. The tolerances of welding seams are defined by DIN EN ISO 5817, if it is not specified on the actual scale drawing or data sheet. In addition to this we point out that our data sheet and corresponding scale drawings are not a substitute for the original drawings.